

ANPING MENGKE
WIRE MESH MANUFACTURE CO., LTD



Sliding Gate

CATALOG

Fencing System



info@walcoom.com



Fence Gates / *Sliding Gate*

Sliding gate is generally used for both vehicle and pedestrian entry purpose. It adopts a ground mounted track for the gate wheel to move on. Besides, its line movement makes it do not require large operating space and is perfect for space limited locations.

Its tracked sliding can also have larger opening widths.

It can work with both manual operating systems and automation systems to allow authorized vehicle & pedestrian access to the fence more easily.

We have a variety of sliding gates for chain link fence, curvy welded fence, 358 high security fence, steel fence and palisade fencing for you to choose from.





⊕ **Chain link fence sliding gate** / Match with chain link fence




| | |
|----------------------|---|
| Height | 1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m |
| Width | 4.0 m, 4.8 m, 6.0 m, 10.0 m |
| Mesh Size | 50 × 50 mm, 60 × 60 mm, 70 × 70 mm |
| Wire Diameter | 3.0–5.0 mm |
| Post (round) | 48 mm OD, 60 mm OD |
| Frame Tube | 32 mm OD, 38 mm OD, etc. |

⊕ **Curvy welded fence sliding gate** / Match with curvy welded fence



| | |
|--------------------------|---|
| Height | 1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m |
| Width | 4.0 m, 4.8 m, 6.0 m, 10.0 m |
| Mesh Size | 50 × 100 mm, 50 × 200 mm, 75 × 150 mm |
| Wire Diameter | 3.0–5.0 mm |
| Post (square) | 60 × 60 mm, 80 × 80 mm, 100 × 100 mm |
| Frame Tube | 20× 20 mm, 25× 25 mm, 30 × 30 mm |
| Surface Treatment | Hot dipped galvanized, powder coating |

⊕ **358 high security fence sliding gate** / Match with 358 high security fence

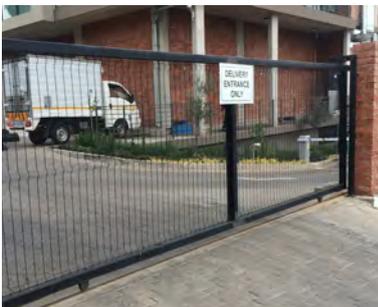

| | |
|--------------------------|---|
| Height | 1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m |
| Width | 4.0 m, 4.8 m, 6.0 m, 10.0 m |
| Mesh Size | 76.2 × 12.7 mm (3" × 0.5") |
| Wire Diameter | 3.2 mm, 4.0 mm |
| Post (square) | 60 × 60 mm, 80 × 80 mm, 100 × 100 mm |
| Frame Tube | 25× 25 mm, 30 × 30 mm |
| Surface Treatment | Hot dipped galvanized, powder coating |

⊕ **Steel fence sliding gate** / Match with steel fence



| | |
|----------------------------|---|
| Height | 1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m |
| Width | 4.0 m, 4.8 m, 6.0 m, 10.0 m |
| Vertical Tube Space | 100 mm, 120 mm, 150 mm, 170 mm |
| Tube Size | 15 × 15 mm, 19 × 19 mm, 30 × 30 mm, 40 × 40 mm |
| Post (square) | 60 × 60 mm, 80 × 80 mm, 100 × 100 mm |
| Surface Treatment | Hot dipped galvanized, powder coating |

⊕ **Palisade fencing sliding gate** / Match with palisade fencing



| | |
|--------------------------|---|
| Height | 1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m |
| Width | 4.0 m, 4.8 m, 6.0 m, 10.0 m |
| Angle Steel | 40 × 40 mm, 50 × 50 mm |
| Pale Size (W/D) | 62 mm, 65 mm, 70 mm |
| Post (square) | 60 × 60 mm, 80 × 80 mm, 100 × 100 mm |
| Surface Treatment | Hot dipped galvanized, powder coating |



ANPING MENGKE

WIRE MESH MANUFACTURE CO., LTD



East Industrial Zone, Anping, Hebei,
China.



info@walcoom.com

